

# LIDAN



## Offshore

Within this segment Lidan Marine supplies Launch and Recovery Systems for ROV's designed for submersion down to 6 000 meters' depth. A vast range of umbilical winches, cranes, overhead travelling systems and A-frames has been proven to complete reliability. To increase the equipments accessibility in the toughest of sea conditions Lidan Marine has launched a top-of-the-line AHC technology. The company also provides submersible control and safety systems for the Seismic industry.

## Industry

Lidan Marine supplies tailored winch and handling systems. Examples are high resolution test equipment for helicopters rescue hoists and winches for heavy vehicle test ranges with extreme speed control requirements. The company also supplies a broad range of winches for heavy door handling including redundant safety systems.

## Naval

Lidan Marine is one of the world's leading suppliers of advanced handling equipment for naval vessels. The company has focused on proving dependable multi purpose systems that are light and compact. The customers can access a wide portfolio of proven technology for handling equipment in the area of MCM and ASW.

## RoRo

Lidan Marine is, by supplying roughly 70 % of the world market, the global leader in deign and manufacture of handling equipment for heavy stern and side ramps for deeps sea RoRo vessels. This larger class of ships usually handles more than 2 500 car equivalent units. The customers require that the systems are equipped with constant tension technology compensating for tide, sea heave and cargo loading and unloading.




**Lidan Marine AB**

Box 854 SE-531 18 Lidköping, Sweden

**Visit address:** Fiskaregatan 3

**Phone:** +46(0)510 54 52 50

**Email:** info@lidanmarine.com

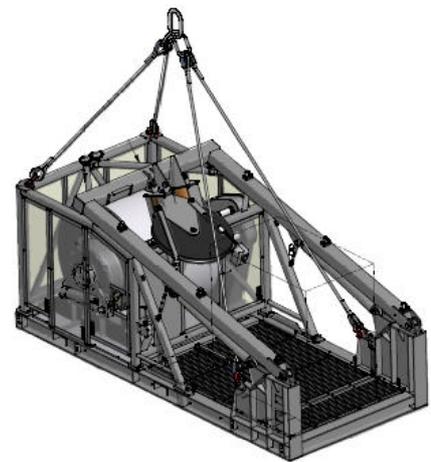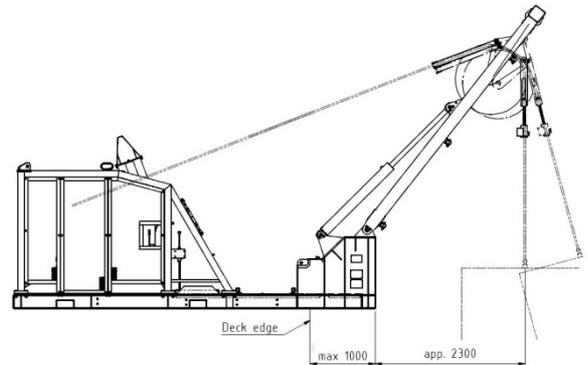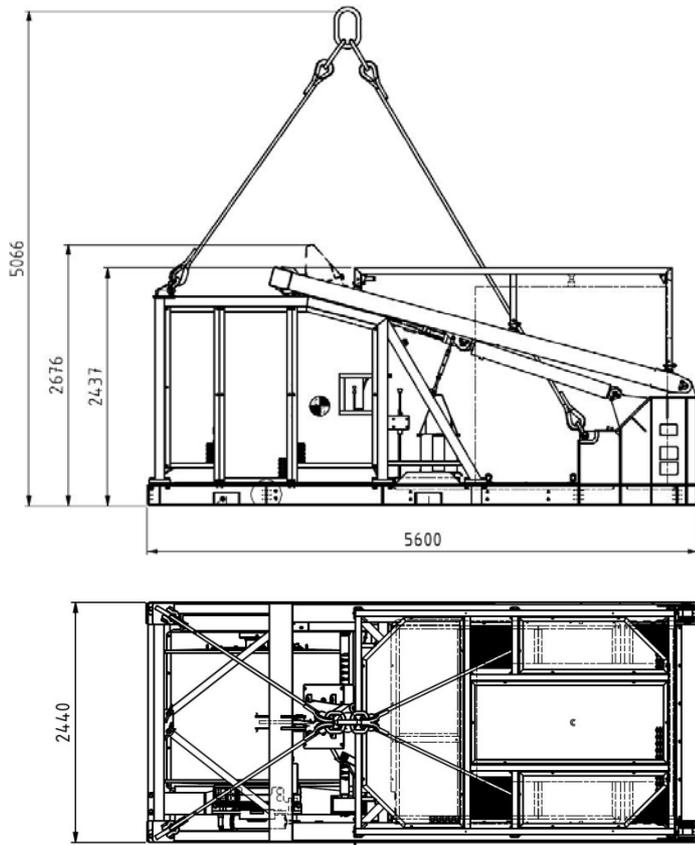

### ROV LARS SWL 2 ton

The equipment is designed in accordance with DNV Lifting Appliances 2.22-2011 regulations and DNV standard for certification no. 2.7-3-2011

#### A-Frame Characteristics

SWL:	4,5 ton (9921 lbs)
DAF:	3
Design Load:	13 ton (28660 lbs)
Outreach:	2300 mm

#### Winch Characteristics:

SWL:	2 ton (4410 lbs)
Pull top layer:	4 ton (8818 lbs)
Pull bottom layer:	6,5 ton (14330 lbs)
DAF:	3
Design load:	13 ton (28660 lbs)
Line speed:	0 – 25 m/min
Drum storage capacity:	3000 m Ø 25,28 mm
Layers:	14
Drum PCD bottom layer:	1105 mm
Drum flange diameter:	1860 mm
Distance between drum flanges:	1290 mm
Power Supply:	55 kW
Weight:	10500 kg



Watch demonstration of  
Active Heave Compensation

**Lidan Marine AB**  
Box 854 SE-531 18 Lidköping, Sweden  
**Visit address:** Fiskaregatan 3  
**Phone:** +46(0)510 54 52 50  
**Email:** info@lidanmarine.com